

11 Publication number:

0 147 845  
A2

12

EUROPEAN PATENT APPLICATION

21 Application number: 84116330.6

51 Int. Cl.<sup>4</sup>: C 23 C 8/22  
F 27 B 9/04

22 Date of filing: 27.12.84

30 Priority: 27.12.83 JP 247174/83

43 Date of publication of application:  
10.07.85 Bulletin 85/28

84 Designated Contracting States:  
BE DE FR GB IT SE

71 Applicant: Chugai Ro Kogyo Co., Ltd.  
4-7, Kyomachibori 2-chome Nishi-ku  
Osaka-shi Osaka-fu(JP)

72 Inventor: Murakami, Koji  
8-11-216, Showaen Settsu-shi  
Osaka-fu(JP)

72 Inventor: Shima, Tsunao  
1-3-8, Mayumi Ikoma-shi  
Nara-ken(JP)

72 Inventor: Shimosato, Yoshikazu  
14-109, Kakigadani Yahata  
Yahata-shi Kyoto-fu(JP)


72 Inventor: Yokoyama, Akira  
537-19, Teraji Seto-cho  
Akaiwa-gun Okayama-ken(JP)

74 Representative: Glawe, Delfs, Moll & Partner  
Patentanwälte  
Postfach 26 01 62 Liebherrstrasse 20  
D-8000 München 26(DE)

54 Method of gas carburizing and hardening and continuous furnace therefor.

57 A method of gas carburizing and hardening a steel article (W) and a continuous furnace (K1, K2) therefor. The method includes the steps of carburizing the article (W) in a

carburizing atmosphere at atmospheric pressure, heating the article (W) in a vacuum for a predetermined period of time, and hardening the article (W).

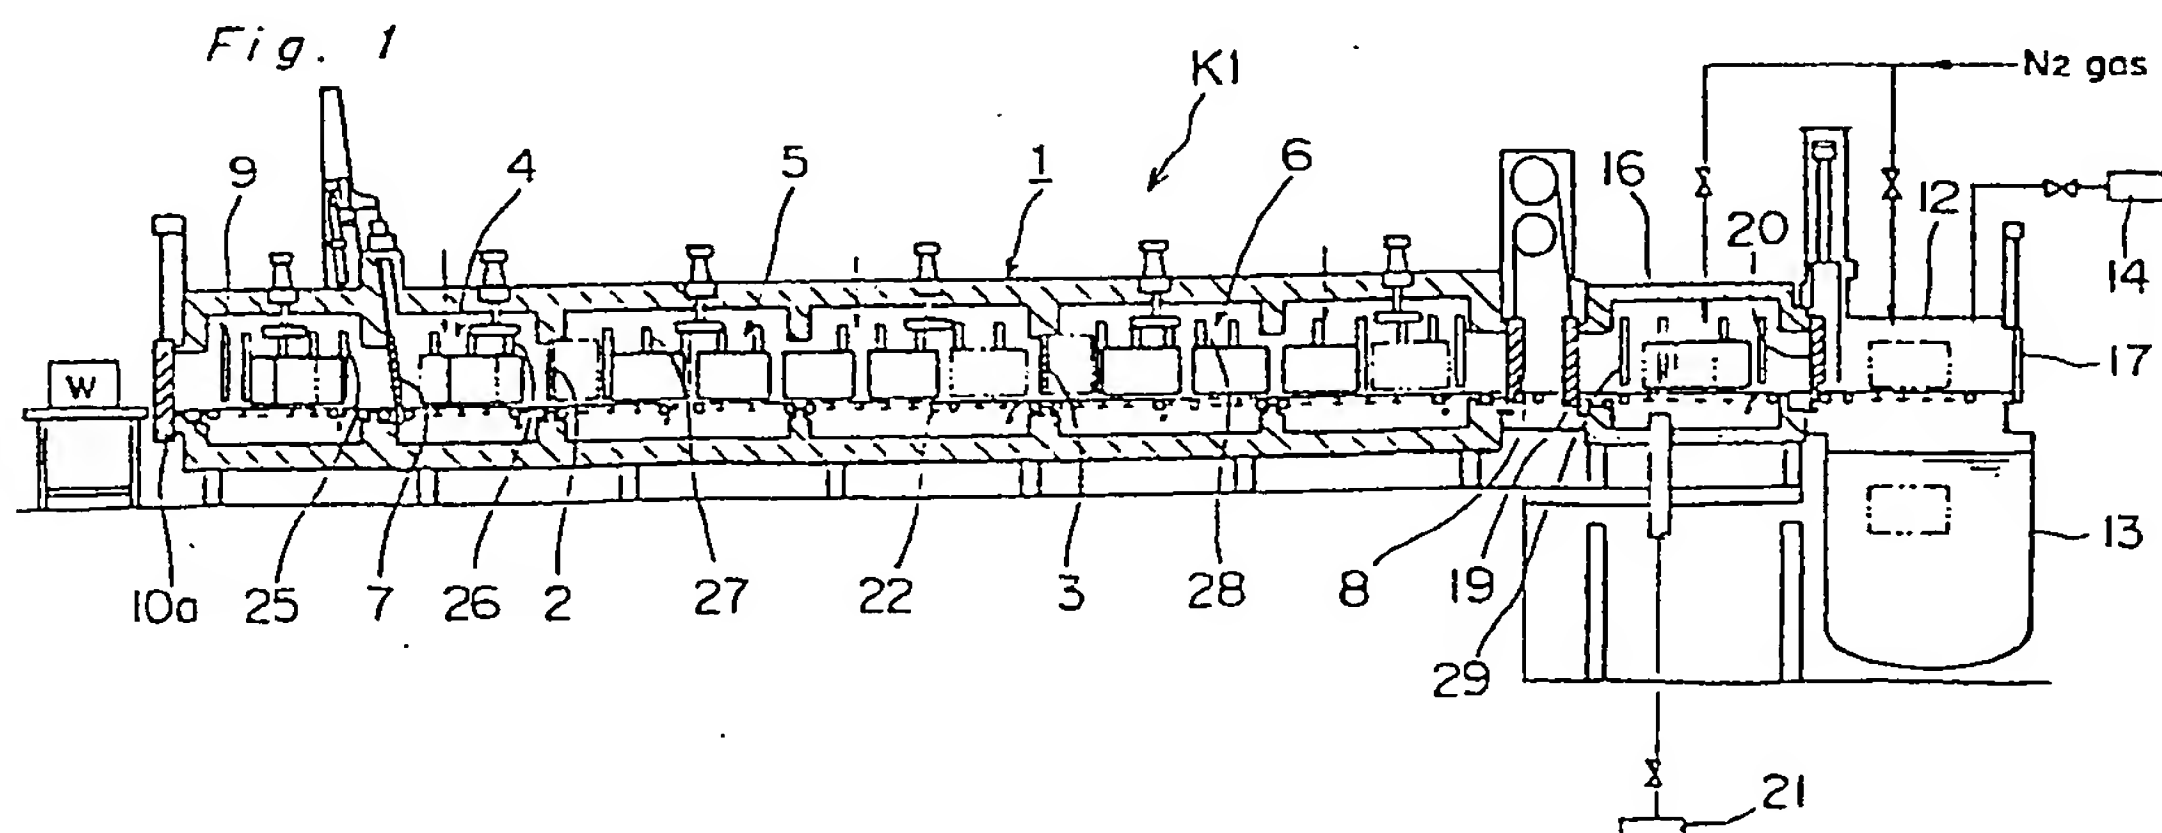

EP 0 147 845 A2

METHOD OF GAS CARBURIZING AND HARDENING  
AND CONTINUOUS FURNACE THEREFOR

BACKGROUND OF THE INVENTION

The present invention generally relates to heat treatment and more particularly, to a method of gas carburizing and hardening steel articles and a continuous  
5 furnace therefor.

It has been conventionally known that processes of gas carburizing and hardening steel articles comprise a heating step of heating the steel articles to a carburizing temperature, a carburizing step of holding the steel articles in a carburizing atmosphere for a predetermined period of time so as to cause carbon to be absorbed into surfaces of the steel articles, a diffusing step of diffusing the absorbed carbon into the steel articles, and a hardening step of cooling the steel articles so as to harden  
15 the steel articles. Meanwhile, the processes of gas carburizing and hardening the steel articles are classified, in accordance with pressures in furnaces at the carburizing step and the diffusing step, into a gas carburizing and hardening method in which the steel articles are heat  
20 treated in the vicinity of atmospheric pressure by using an

endothermic atmosphere or a mixture of  $N_2$  gas and a hydrocarbon gas, and a vacuum carburizing and hardening method in which the steel articles are heat treated at subatmospheric pressure by using a mixture of  $N_2$  gas and a hydrocarbon gas or the hydrocarbon gas only. The gas carburizing and hardening method has such an advantage as to enable a continuous furnace to have a simple construction but is disadvantageous not only in that the processed steel articles assume so-called carburizing colors such as a grayish brown color, a grayish black color, etc. but in that a quenching media becomes rapidly deteriorated, thereby resulting in a short life thereof. On the other hand, in the vacuum carburizing and hardening method, the steel articles have bright surfaces without assuming the carburizing colors and the quenching media has a long life. However, the vacuum carburizing and hardening method has such an inconvenience that since a plurality of chambers each separated by a vacuum partition door from one another are required to be provided in order to produce a continuous furnace, the continuous furnace becomes complicated in structure.

Meanwhile, the above described carburizing colors are produced by chromic oxides formed on the surfaces of the processed articles during the gas carburizing process or soot adhering to the surfaces of the processed articles during the gas carburizing process. It is known that when

an article having a carburizing color is heated at about 900°C in a vacuum of  $10^{-1}$  to  $10^{-2}$  torr, dissociation of oxygen is effected due to drop in partial pressure of oxygen such that the processed article has a bright surface.

5 SUMMARY OF THE INVENTION

Accordingly, an essential object of the present invention is to provide an improved method of gas carburizing and hardening a steel article and an improved continuous furnace therefor, by which the processed article  
10 has a bright surface and is reduced in amount of intergranular oxidation layers, with substantial elimination of the disadvantages inherent in conventional methods and continuous furnaces of this kind.

In accomplishing these and other objects according  
15 to one preferred embodiment of the present invention, there is provided an improved method of gas carburizing and hardening a steel article, comprising the steps of: carburizing said steel article in a carburizing atmosphere at atmospheric pressure; heating said steel article in a  
20 vacuum for a predetermined period of time; and hardening said steel article.

In accordance with the present invention, since the advantages of the prior art two methods, i.e. the advantages of the gas carburizing and hardening method and  
25 the vacuum carburizing and hardening method are combined, the steel articles can be continuously heat treated in aerobic conditions.

BRIEF DESCRIPTION OF THE DRAWINGS

These and other objects and features of the present invention will become apparent from the following description taken in conjunction with the preferred embodiment thereof with reference to the accompanying  
5 drawings, in which:

Fig. 1 is a schematic vertical sectional view of a continuous furnace including a plurality of chambers, according to a first embodiment of the present invention;

10 Fig. 2 is a schematic horizontal sectional view of the continuous furnace of Fig. 1;

Fig. 3 is a cross-sectional view of a vacuum heating chamber employed in the continuous furnace of Fig. 1;

15 Fig. 4a is a schematic view of a plurality of drive units for driving rollers for conveying steel articles, which are employed in the continuous furnace of Fig. 1;

20 Fig. 4b is a view similar to Fig. 2, particularly showing the rollers driven by the driving units of Fig. 4a;

Fig. 4c is a chart indicative of transfer speed and path of the steel articles at the respective chambers;

25 Figs. 4d and 4e are graphs showing temperature and pressure in the chambers of the continuous furnace of Fig. 1, respectively;

Fig. 5 is a graph showing temperature and pressure in the vacuum heating chamber of Fig. 3;

Fig. 6 is a view similar to Fig. 1, particularly showing a continuous furnace according to a second embodiment of the present invention; and

Figs. 7a and 7b are graphs indicative of temperature and pressure in the chambers of the continuous furnace of Fig. 6, respectively.

Before the description of the present invention proceeds, it is to be noted that like parts are designated by like reference numerals throughout several views of the accompanying drawings.

#### DETAILED DESCRIPTION OF THE INVENTION

Referring now to the drawings, there is shown in Figs. 1 to 3, a continuous furnace K1 for continuously gas carburizing and hardening metal articles W, according to a first embodiment of the present invention. The continuous furnace K1 includes a carburizing apparatus 1, a vacuum heating chamber 16 and a hardening apparatus 12 provided with an oil quenching tank 13 and an elevator (not shown), which are longitudinally arranged in this order. The carburizing apparatus 1 includes a loading vestibule 9 having a loading door 10a, a heating chamber 4, a carburizing chamber 5 and a diffusing chamber 6 having a discharge door 8, which are longitudinally arranged in this order. Partition doors 7, 2 and 3 are, respectively,

provided between the loading vestibule 9 and the heating chamber 4, between the heating chamber 4 and the carburizing chamber 5 and between the carburizing chamber 5 and the diffusing chamber 6. Either an endothermic gas composed of 20 to 25% by volume of CO and 30 to 40% by volume of  $H_2$  or  $N_2$  gas is introduced into the heating chamber 4, while a carburizing atmosphere, which is a mixture of a hydrocarbon gas (e.g. propane) and either one of the above endothermic gas and  $N_2$  gas, is introduced into the carburizing chamber 5 and the diffusing chamber 6. The hardening apparatus 12 is provided with a discharge door 17, while the vacuum heating chamber 16 is provided with a loading door 19 and a discharge door 20 so as to be coupled with the hardening apparatus 12.

Meanwhile, the hardening apparatus 12 is connected with an evacuation device 14, while the vacuum heating chamber 16 is connected with an evacuation device 21. It is so arranged that  $N_2$  gas is supplied into the hardening apparatus 12 and the vacuum heating chamber 16. Furthermore, the continuous furnace K1 includes rollers 22 for conveying the articles W. The loading vestibule 9, heating chamber 4, carburizing chamber 5, diffusing chamber 6 and vacuum heating chamber 16, except for the hardening apparatus 12, are provided with heating devices 25, 26, 27, 28 and 29, respectively.

Hereinbelow, operations of the continuous furnace K1 will be described with reference to Figs. 4 and 5. Figs.



4d and 4e show temperature and pressure in the chambers of the continuous furnace K1, respectively.

Example 1

A round rod made of chromium steel SCr415 (JIS) and a gear made of chromium steel SCr420 (JIS) are employed as the articles W and are treated on the following conditions.

(1) Carburizing process

1) Carburizing temperature = 930°C

10 2) Carburizing period

a. Carbon potential = 1.1%

b. Processing time period = 105 min.

3) Diffusing period

a. Carbon potential = 0.8%

15 b. Processing time period = 45 min.

(2) Vacuum heating process

After the diffusing process, the articles W are held in a vacuum of  $10^{-2}$  torr at a furnace temperature of 930°C for 30 min.

20 (3) Hardening process

The articles W are subjected to oil quenching directly from the carburizing temperature of 930°C.

The results of the above treatment are as follows.

The round rod made of SCr415 and the gear made of SCr420 have bright surfaces and are formed with intergranular oxidation layers of 4 to 8 microns in thickness.



Example 2

A round rod made of SCr415 and a gear made of SCr420 are employed as the articles W in the same manner as in the above Example 1 and are treated on the following conditions.

## (1) Carburizing process

1) Carburizing temperature = 930°C

2) Carburizing period

a. Carbon potential = 1.1%

b. Processing time period = 105 min.

3) Diffusing period

a. Carbon potential = 0.8%

b. Processing time period = 45 min.

## (2) Vacuum heating process

The articles W are held in a vacuum of  $10^{-2}$  torr for 30 min. during which temperature of the articles W drops to a hardening temperature of 850°C after the diffusing process.

## (3) Hardening process

The articles W are subjected to oil quenching immediately after the temperature of the articles W has dropped to the hardening temperature of 850°C.

The results of the above treatment are as follows.

The round rod made of SCr415 and the gear made of SCr420 have bright surfaces and are formed with intergranular oxidation layers of 5 to 10 microns in thickness.

Example 3

A round rod made of chromium molybdenum steel SCM420H (JIS) is employed as the article W and is treated on the following conditions.

## 5 (1) Carburizing process

1) Carburizing temperature = 930°C

2) Carburizing period

a. Carbon potential = 1.1%

b. Processing time period = 120 min.

## 10 (2) Vacuum heating process

The article W is held in a vacuum of  $5 \times 10^{-2}$  torr not only for a diffusing period of 30 min. after the carburizing period but for 20 min. during which temperature of the article W drops to a hardening temperature of 850°C after the diffusing process.

## 15 (3) Hardening process

The article W is subjected to oil quenching immediately after the temperature of the article W has dropped to the hardening temperature of 850°C.

20 The results of the above treatment are as follows.

The round rod made of SCM420H has a bright surface and is formed with abnormal surface structure (troostitic layers) of not more than 5 microns in thickness.

Comparative Example

25 When the articles W are not subjected to the vacuum heating process in the above Examples 1 to 3, namely

the articles W are subjected to the oil hardening process directly after the diffusing process, the articles W have the carburizing colors such as grayish brown color, grayish black color, etc. and are formed with intergranular oxidation layers of 15 to 20 microns in thickness.

As shown in Fig. 4a, the continuous furnace K1 includes a plurality of drive units for driving the rollers 22 for conveying the articles W. Each of the articles W is conveyed by the drive units at different speeds in the furnace K1 so as to be oscillated in a path of the articles W as shown in Fig. 4c. In the furnace K1, it is so arranged that as soon as the article W has been loaded into the vacuum heating chamber 16, the vacuum heating chamber 16 is evacuated to a vacuum by the evacuation device 21 as shown in Fig. 4e. However, it was found that the articles W have bright surfaces and are formed with decreased intergranular oxidation layers even in the case where the vacuum heating chamber 16 is evacuated to a vacuum in the course of drop of temperature therein during the vacuum heating process or after drop of the temperature of the articles W to the hardening temperature of 850°C, or prior to drop of the temperature of the articles W to the hardening temperature, e.g. the vacuum heating chamber 16 is evacuated to a vacuum during the diffusing period such that part of the diffusing process is performed in the vacuum heating chamber 16 as shown in Fig. 5. Namely, in the case where the temperature

of the articles W is lowered to the hardening temperature after the carburizing process, a decision as to when the vacuum heating process is started is made in accordance with amount of the articles W to be treated and piling conditions of the articles W. Meanwhile, in the case where the articles W are subjected to the hardening process immediately after the carburizing process, the articles W are subjected to the vacuum heating process during a latter part of the diffusing period.

It is to be noted that the hardening apparatus 12 is not limited to the oil quenching apparatus but a gas cooling apparatus can be employed as the hardening apparatus 12 in place of the oil quenching apparatus. Furthermore, the hardening apparatus 12 is not necessarily required to be provided with the evacuation device 14. However, when the hardening apparatus 12 is provided with the evacuation device 14 such that a controlled atmosphere or  $N_2$  gas is introduced into the hardening apparatus 12 after the hardening apparatus 12 has been evacuated to a vacuum, amount of the controlled atmosphere or  $N_2$  gas drawn into the hardening apparatus 12 is less than that in the case of purging the interior of the hardening apparatus 12 with the controlled atmosphere, thus resulting in a more economical operation.

Referring to Fig. 6, there is shown a continuous furnace K2 according to a second embodiment of the present

invention. The continuous furnace K2 includes the loading vestibule 9 having the loading door 10a and a discharge door 10b, the carburizing apparatus 1 provided separately from the loading vestibule 9, a purge chamber 15 having a loading door 18, the vacuum heating chamber 16 and the hardening device 12 provided with the oil quenching tank 13. The carburizing apparatus 1 includes the heating chamber 4 having a loading door 7', a carburizing zone 5' and a diffusing zone 6'. The continuous furnace K2 includes the partition door 2 for separating the heating chamber 4 from the carburizing zone 5' as in the continuous furnace K1 but is not provided with the partition door 3 of the continuous furnace K1 for separating the carburizing zone 5' from the diffusing zone 6'. The loading vestibule 9 is connected with an evacuation device 11. The purge chamber 15 is coupled, through the vacuum heating chamber 16, with the hardening apparatus 12. The purge chamber 15 and the vacuum heating chamber 16 are connected with the evacuation device 21. Since other constructions of the continuous furnace K2 are similar to those of the continuous furnace K1, detailed description thereof is abbreviated for the sake of brevity.

Hereinbelow, operations of the continuous furnace K2 will be described with reference to Figs. 7a and 7b showing temperature and pressure in the chambers of the continuous furnace K2, respectively. After the article W made of chromium molybdenum steel SCM420 (JIS), etc. has

been loaded into the loading vestibule 9, the evacuation device 11 is actuated so as to evacuate the loading vestibule 9 to a vacuum and, at the same time, the article W is preheated to temperatures of 400 to 600°C by a heating device (not shown) so as to remove from the article W impurities adhering thereto. After the article W has been preheated, N<sub>2</sub> gas is introduced into the loading vestibule 9 so as to restore the interior of the loading vestibule 9 to atmospheric pressure. Subsequently, the article W is loaded into the heating chamber 4 by opening the discharge door 10b of the loading vestibule 9 and the loading door 7' of the carburizing apparatus 1. After the article W has been heated to a carburizing temperature of about 950°C by a heating device (not shown) in the heating chamber 4, the article W is sequentially subjected to the carburizing process in the carburizing zone 5' and the diffusing process in the diffusing zone 6'. The carburizing process is performed at a carbon potential of 1.0% for 150 min., while the diffusing process is performed at a carbon potential of 0.9% for 90 min.

Thus, when the carburizing process and the diffusing process have been completed, the article W is conveyed into the purge chamber 15 by opening the discharge door 8 of the carburizing apparatus 1 and the loading door 18 of the purge chamber 15. Then, the discharge door 8 and the loading door 18 are closed. When the article W has been

transported into the purge chamber 15, the interior of the  
purge chamber 15 and the vacuum heating chamber 16 is  
maintained at a vacuum of about  $10^{-2}$  torr by the  
evacuation device 21. Thereafter, the article W is loaded  
5 into the vacuum heating chamber 16 by opening the loading  
door 19 of the heating chamber 16 so as to be held in a  
vacuum of about  $10^{-2}$  torr in the vacuum heating chamber 16  
for about 30 min. until the temperature of the article W  
drops to the oil quenching temperature of, for example,  
10 850°C. Meanwhile, the hardening apparatus 12 is evacuated  
to a vacuum of about  $10^{-2}$  torr by the evacuation device  
14. When the temperature of the article W has dropped to  
the hardening temperature in the vacuum heating chamber 16,  
N<sub>2</sub> gas is directed into the vacuum heating chamber 16 and  
15 the hardening apparatus 12 so as to restore the interior of  
the vacuum heating chamber 16 and the hardening apparatus 12  
substantially to atmospheric pressure. Subsequently, the  
article W is loaded into the hardening apparatus 12 by  
opening the discharge door 20 of the vacuum heating chamber  
20 16. Then, the article W is subjected to oil quenching by  
dipping the article W into oil in the oil quenching tank 13  
by the use of the elevator (not shown). After completion of  
the oil quenching, the article W is carried out of the  
hardening apparatus 12 by opening the discharge door 17 of  
25 the hardening apparatus 12, whereby the carburizing process  
and the hardening process of the article W have been  
completed.



Although the loading vestibule 9 is provided with the evacuation device 11 in the continuous furnace K2, it can be also so arranged that, by eliminating the evacuation device 11, the interior of the loading vestibule 9 is purged with a protective controlled atmosphere or the above described carburizing atmosphere after the article W has been loaded into the loading vestibule 9. However, when the loading vestibule 9 is provided with the evacuation device 11 as in the continuous furnace K2, amount of the controlled atmosphere required therefor becomes small, thereby making the carburizing process less expensive.

Furthermore, the purge chamber 15 is not necessarily required to be provided in the continuous furnace K2. In any case, by heating the gas carburized article W in the vacuum heating chamber 16, the article W has a bright surface and is formed with decreased intergranular oxidation layers through dissociation of  $O_2$ .

As is clear from the foregoing description, in accordance with the method of the present invention, since the vacuum heating process is provided between the carburizing process and the hardening process which are performed at atmospheric pressure, production of the carburizing colors associated with the gas carburizing and hardening method is prevented, so that the treated articles have bright surfaces and are formed with decreased intergranular oxidation layers without employing the vacuum

carburizing and hardening method and the continuous furnace can be simplified in structure.

Moreover, in accordance with the continuous furnace of the present invention, since the vacuum heating chamber is provided between the carburizing apparatus and the hardening apparatus and the hardening apparatus is connected with the evacuation device, the continuous furnace has been simplified in structure and lowered in cost as compared with continuous furnaces for vacuum carburizing and hardening.

In addition, in accordance with the present invention, it is possible to continuously gas carburize and harden the articles such that the articles have bright surfaces similar, in color, to the material without assuming the carburizing colors and are formed with decreased intergranular oxidation layers which ensure high wear resistance and high durability of the articles.

Furthermore, in accordance with the present invention, even in the case where the articles are subjected to oil hardening, soot does not adhere to the surfaces of the articles due to the vacuum heating process in the vacuum heating chamber, thus resulting in long life of the quenching media.

Moreover, in accordance with the present invention, in the case where the loading vestibule is evacuated to a vacuum by the evacuation device, a required

amount of the controlled atmosphere becomes small, so that operations of the continuous furnace are economical, while entry of air into the carburizing apparatus is prevented by the loading vestibule and the vacuum heating chamber such that seasoning of the articles can be performed at an early stage.

In addition, in accordance with the present invention, since the loading vestibule is provided with the evacuation device and the heating device, it becomes unnecessary to provide a washing device prior to treatment of the articles.

Although the present invention has been fully described by way of example with reference to the accompanying drawings, it is to be noted here that various changes and modifications will be apparent to those skilled in the art. Therefore, unless otherwise such changes and modifications depart from the scope of the present invention, they should be construed as being included therein.

What is claimed is:

1. A method of gas carburizing and hardening a steel article (W), comprising:

5 a carburizing step of carburizing said steel article (W) in a carburizing atmosphere at atmospheric pressure;

a vacuum heating step of heating said steel article (W) in a vacuum for a predetermined period of time; and

10 a hardening step of hardening said steel article (W).

2. A method as claimed in Claim 1, wherein said vacuum heating step is started after termination of a diffusing period of said carburizing step.

3. A method as claimed in Claim 1, wherein said vacuum heating step is started prior to termination of a diffusing period of said carburizing step.

4. A continuous furnace (K1, K2) for continuously gas carburizing and hardening a steel article (W), comprising:

5 a gas carburizing furnace (1) for gas carburizing said steel article (W) in a carburizing atmosphere at atmospheric pressure, which includes a loading vestibule (9);

a vacuum heating chamber (16) which includes a first heating means (29) and is connected with a first evacuation device (21);

-10           a hardening chamber (12) which includes a  
hardening means (13) and is connected with a second  
evacuation device (14) such that said gas carburizing  
furnace (1), said vacuum heating chamber (16) and said  
hardening chamber (12) are arranged in this order; and  
15           a conveyor means (22) for sequentially conveying  
said steel article (W).

5.           A continuous furnace (K1, K2) as claimed in Claim  
4, wherein said vacuum heating chamber (16) includes a purge  
chamber (15) connected with said first evacuation device  
(21).

6.           A continuous furnace (K1) as claimed in Claim 4,  
wherein said loading vestibule (9) is bounded by a loading  
door (10a) and a first partition door (7) of said gas  
carburizing furnace (1), which are disposed at a loading  
5           side of said gas carburizing furnace (1).

7.           A continuous furnace (K2) as claimed in Claim 4,  
wherein said loading vestibule (9) is disposed forwardly of  
said gas carburizing furnace (1) so as to be coupled  
therewith and is bounded by a loading door (10a) and a  
5           discharge door (10b).

8.           A continuous furnace (K1) as claimed in Claim 6,  
wherein said loading vestibule (9) includes a second heating  
means (25).

9. A continuous furnace (K2) as claimed in Claim 7, wherein said loading vestibule (9) includes a second heating means (25).

10. A continuous furnace (K2) as claimed in Claim 7, wherein said loading vestibule (9) includes a third evacuation device (11).

11. A continuous furnace (K1) as claimed in Claim 8, wherein said gas carburizing furnace (1) is separated into a heating chamber (4) and a carburizing and diffusing chamber (5, 6) by a second partition door (2) provided at a predetermined position in said gas carburizing furnace (1).

12. A continuous furnace (K2) as claimed in Claim 10, wherein said gas carburizing furnace (1) is separated into a heating chamber (4) and a carburizing and diffusing chamber (5, 6) by a second partition door (2) provided at a predetermined position in said gas carburizing furnace (1).

13. A continuous furnace (K1) as claimed in Claim 8, wherein said gas carburizing furnace (1) is separated into a heating chamber (4), a carburizing chamber (5) and a diffusing chamber (6) by a second partition door (2) and a third partition door (3) which are provided at predetermined positions in said gas carburizing furnace (1), respectively.

14. A continuous furnace (K2) as claimed in Claim 10, wherein said gas carburizing furnace (1) is separated into a heating chamber (4), a carburizing chamber (5) and a diffusing chamber (6) by a second partition door (2) and a

5 third partition door (3) which are provided at predetermined positions in said gas carburizing furnace (1), respectively.

15. A continuous furnace (K1) as claimed in Claim 6, wherein said conveyor means (22) is formed by a plurality of groups of roller conveyors (22).

16. A continuous furnace (K2) as claimed in Claim 7, wherein said conveyor means (22) is formed by a plurality of groups of roller conveyors (22).

17. A continuous furnace (K1) as claimed in Claim 11, wherein said conveyor means (22) is formed by a plurality of groups of roller conveyors (22).

18. A continuous furnace (K2) as claimed in Claim 12, wherein said conveyor means (22) is formed by a plurality of groups of roller conveyors (22).

19. A continuous furnace (K1) as claimed in Claim 13, wherein said conveyor means (22) is formed by a plurality of groups of roller conveyors (22).

20. A continuous furnace (K2) as claimed in Claim 14, wherein said conveyor means (22) is formed by a plurality of groups of roller conveyors (22).



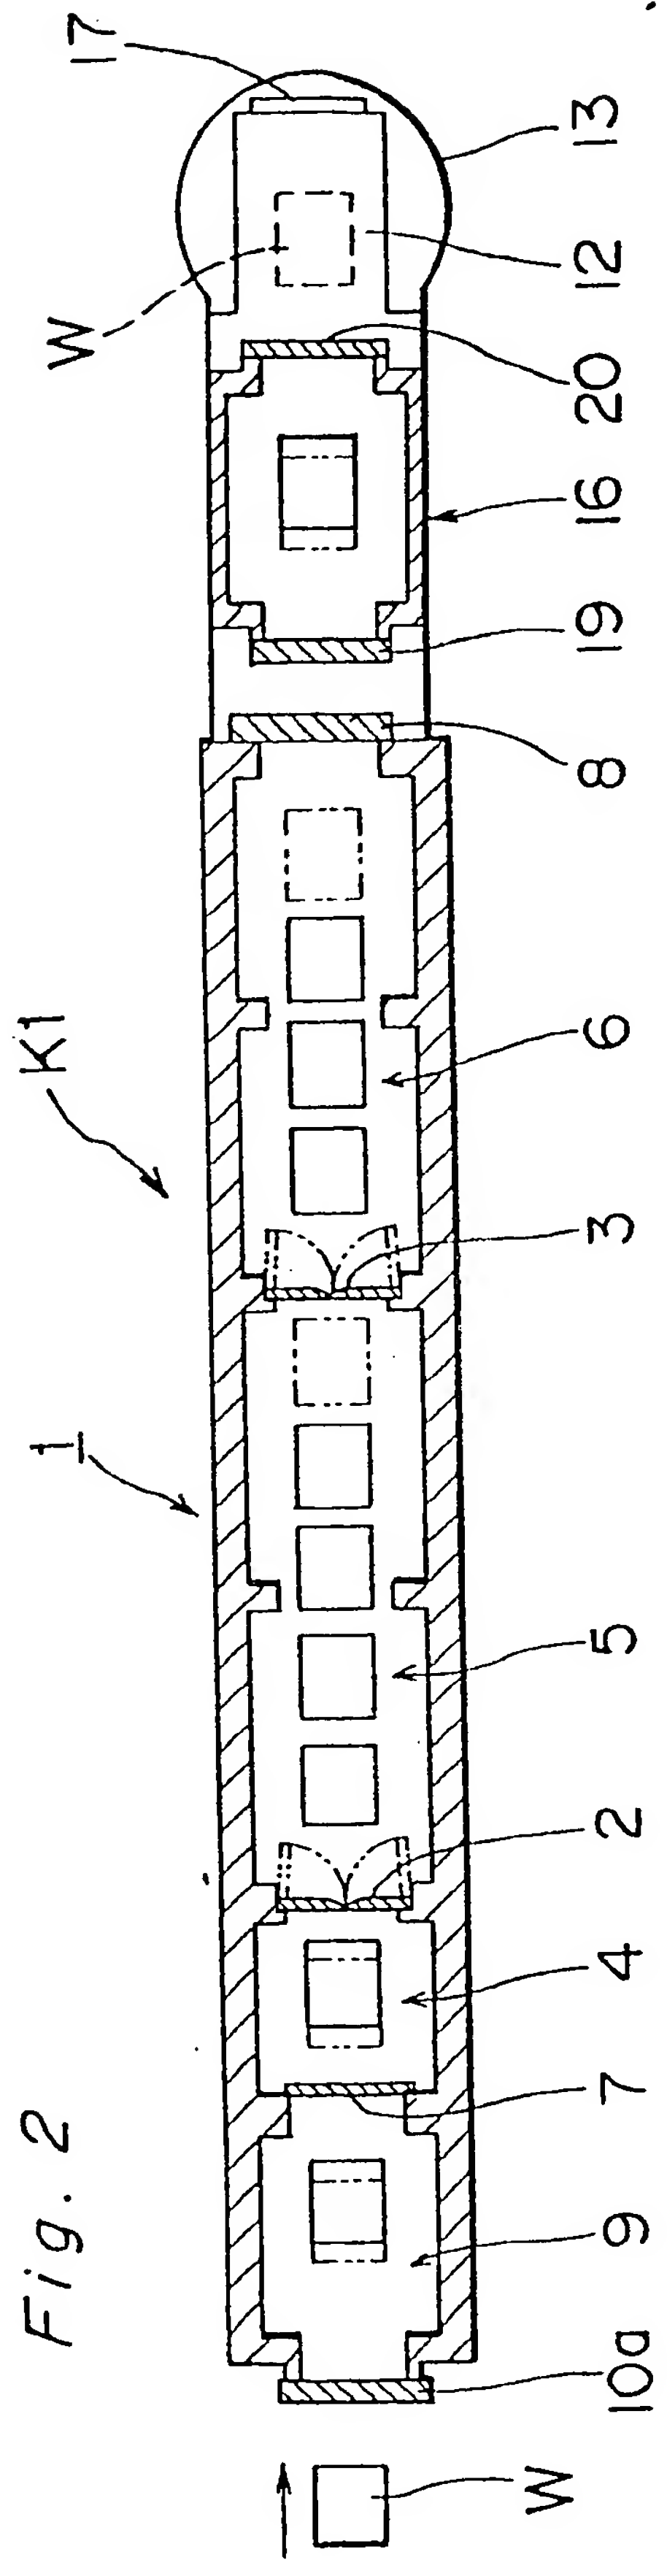
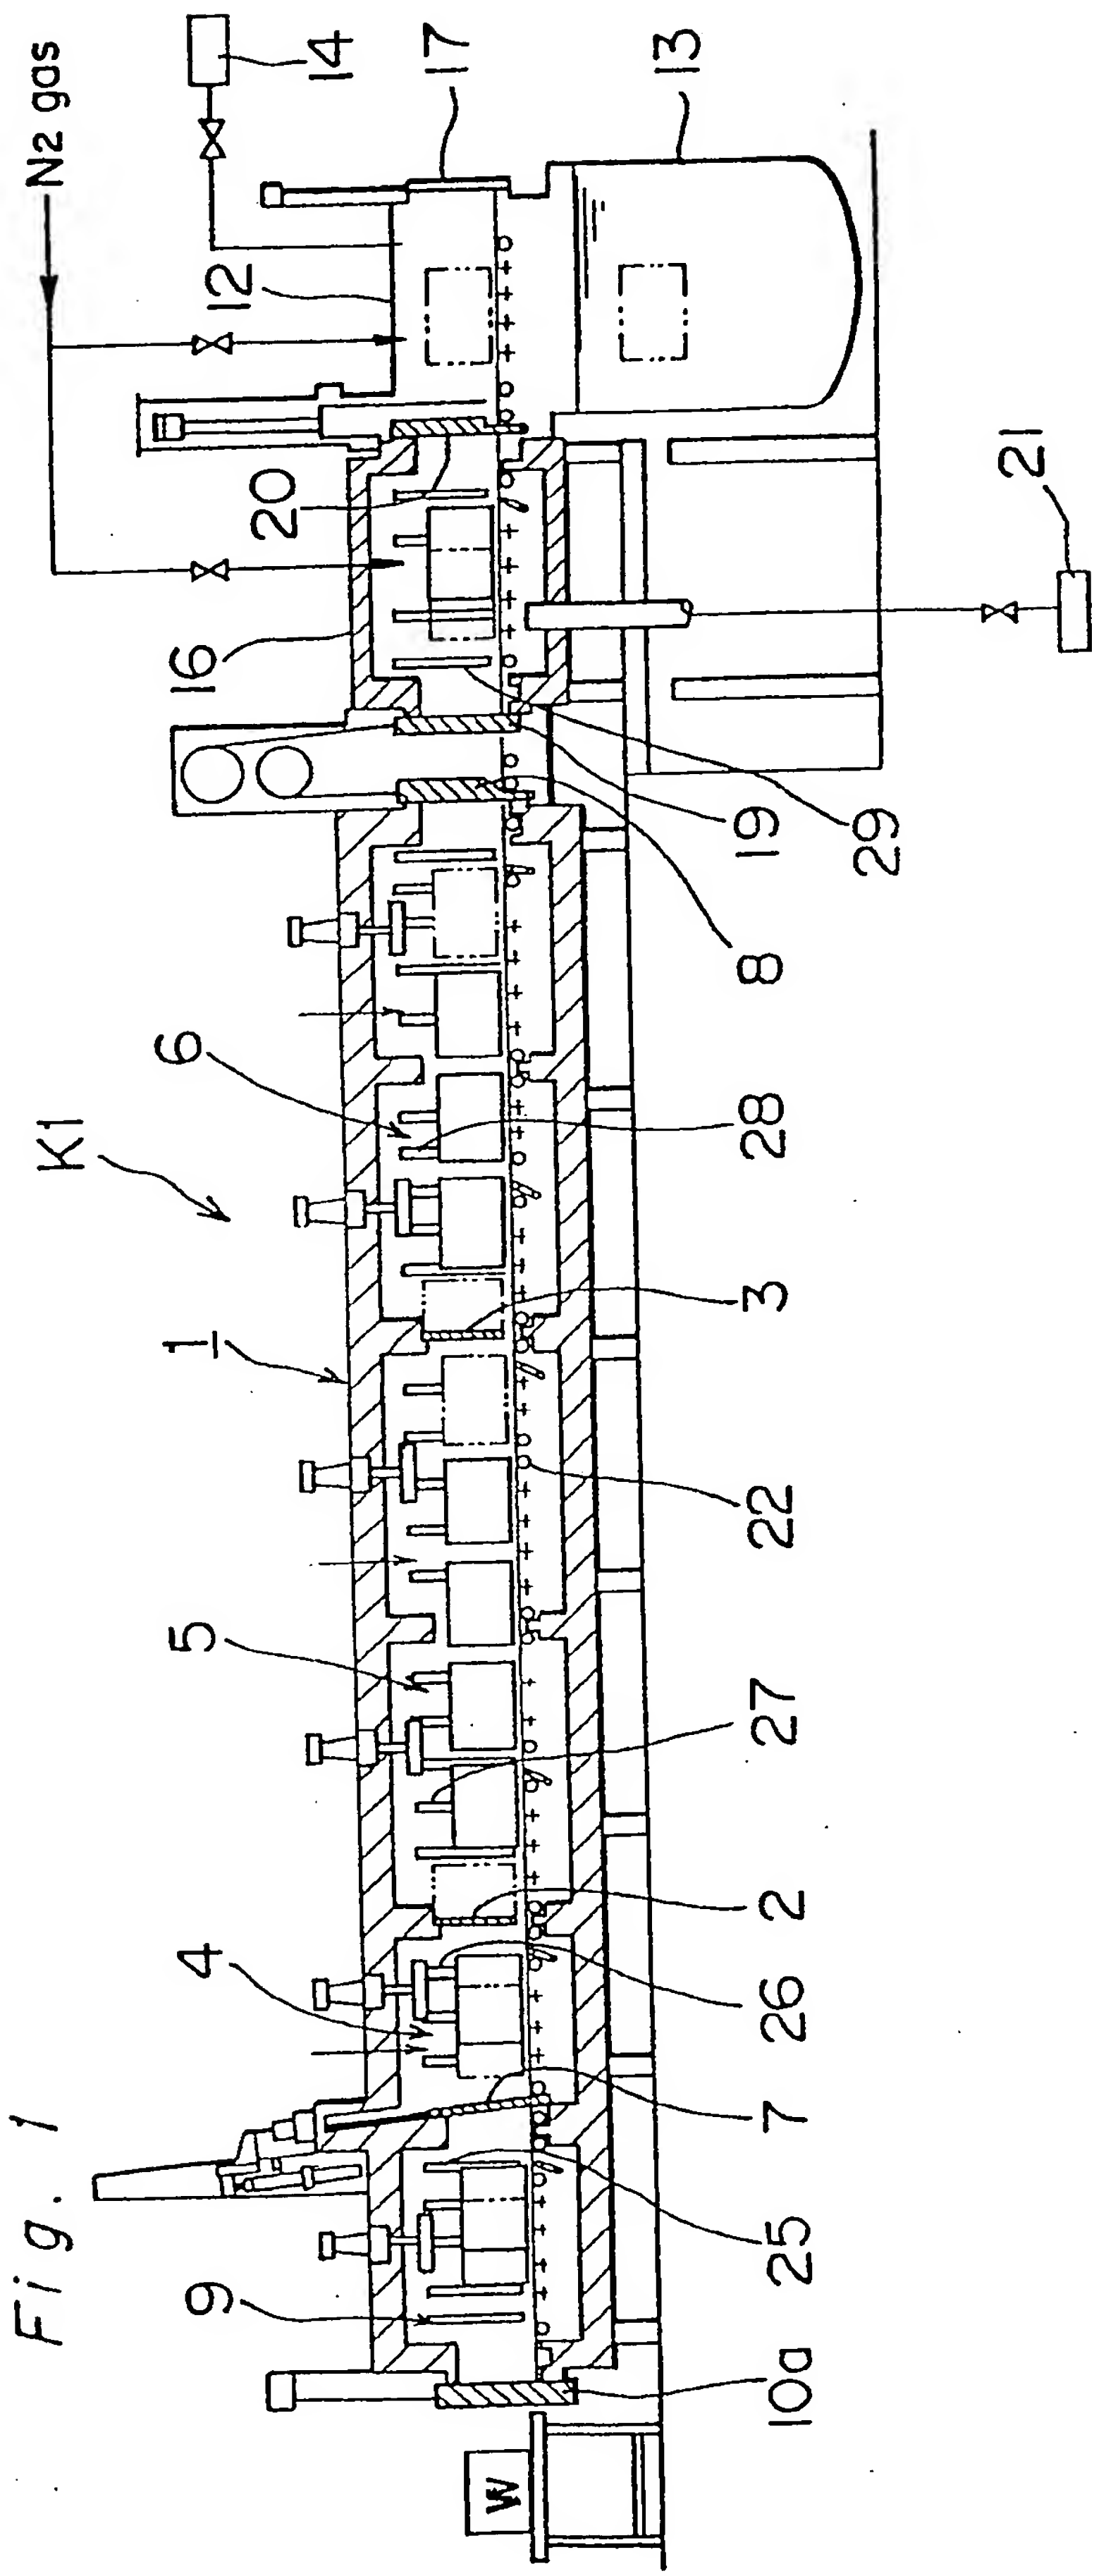


Fig. 3

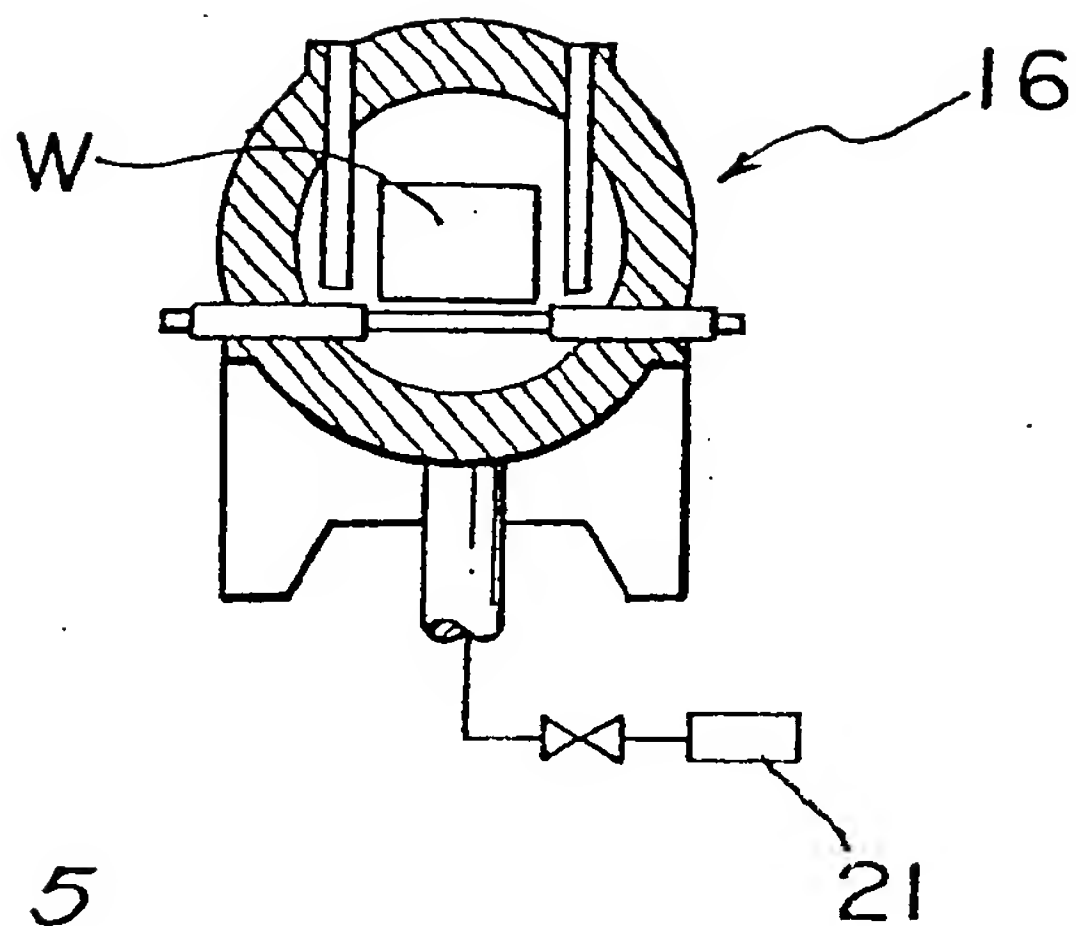


Fig. 5



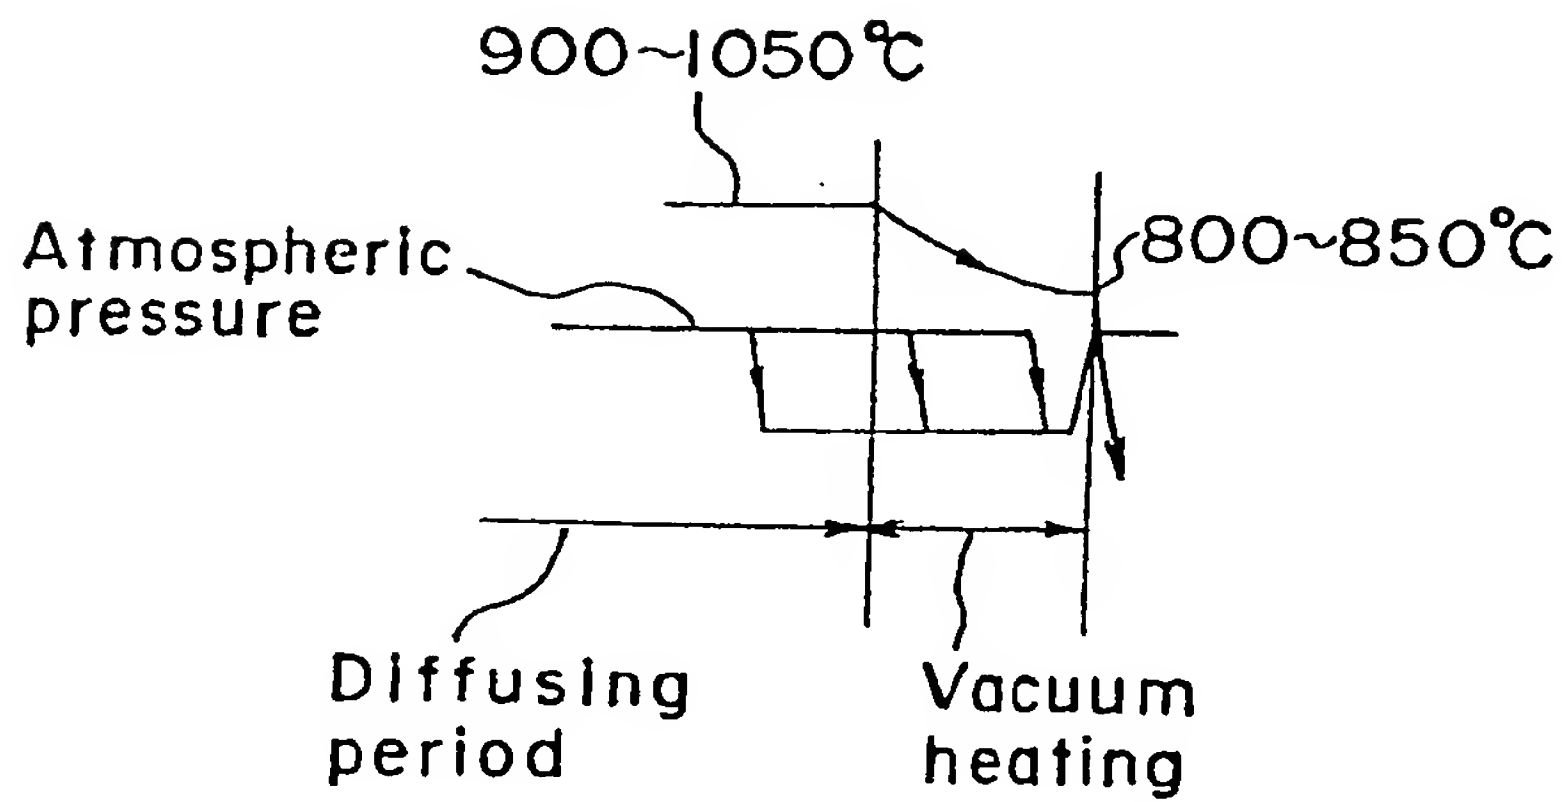




Fig. 6

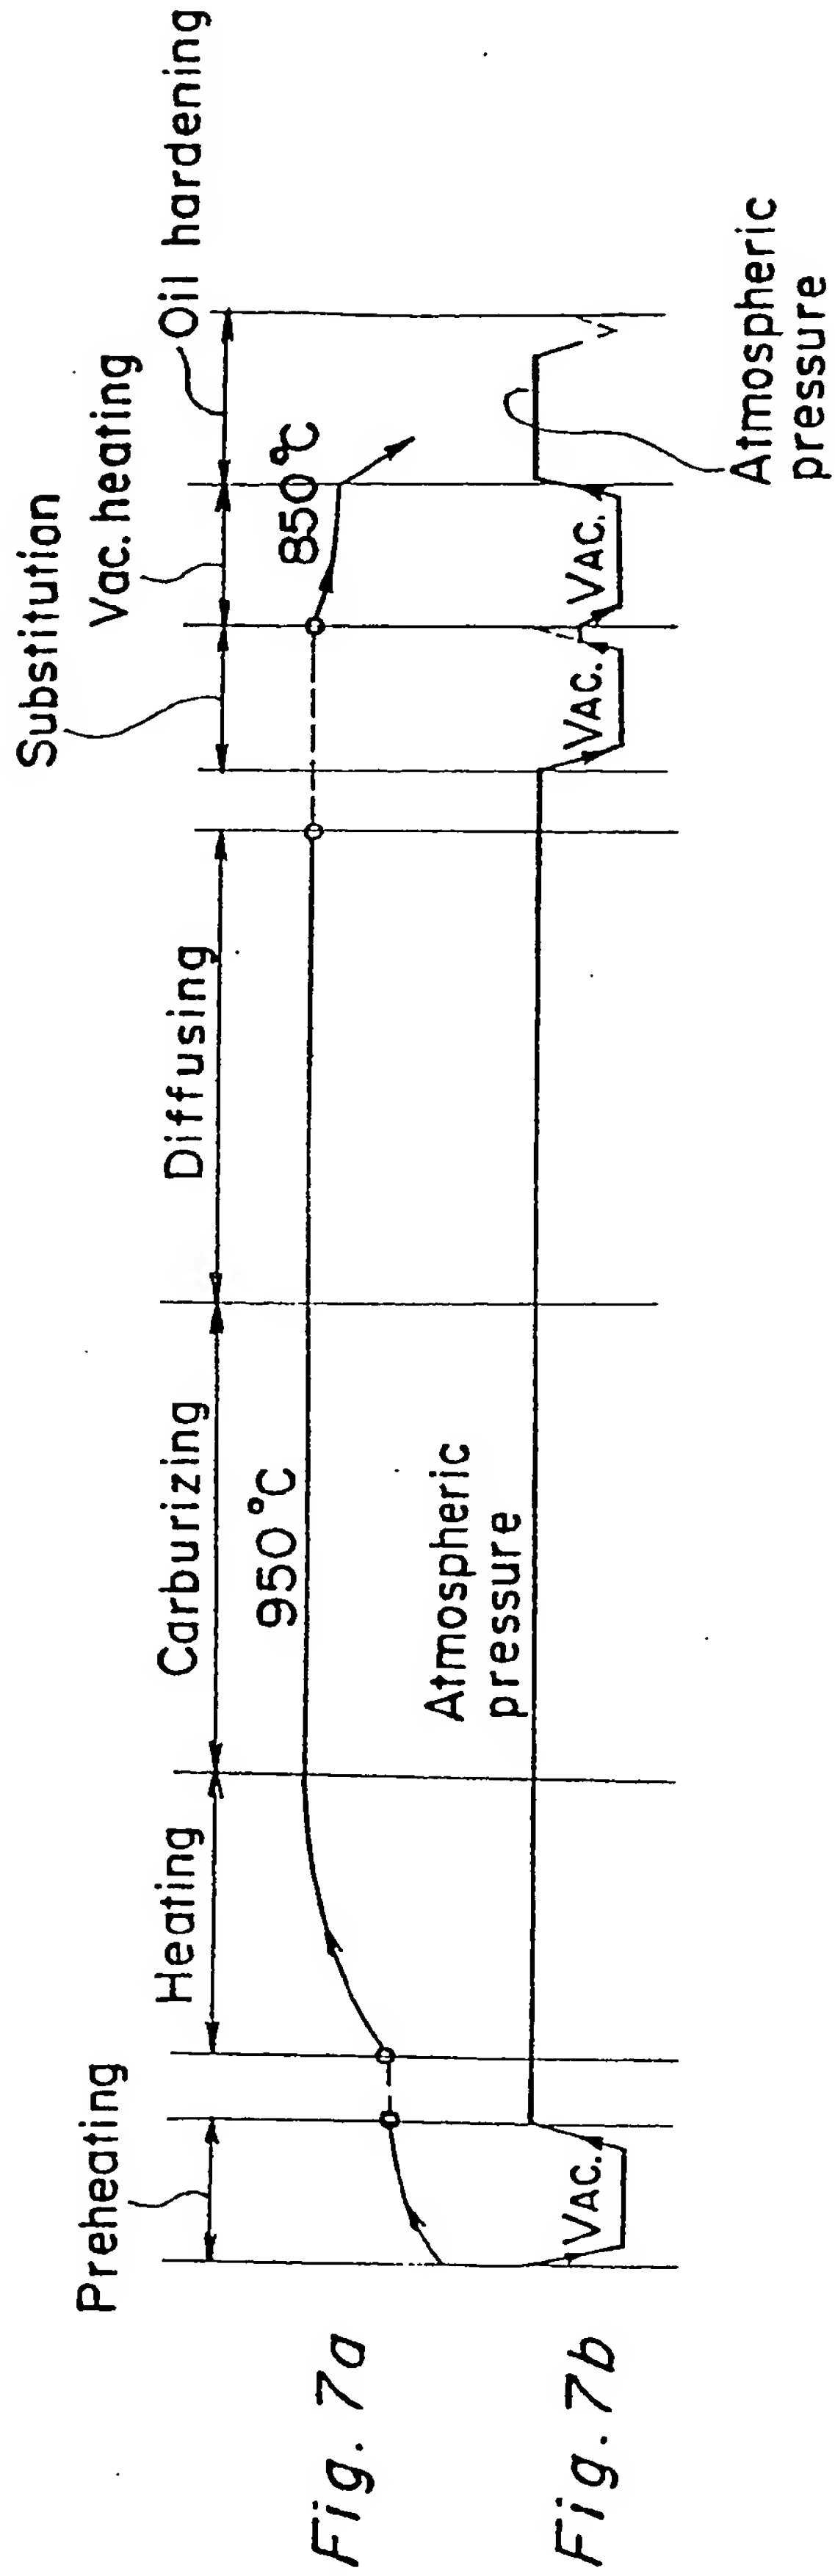

0147845

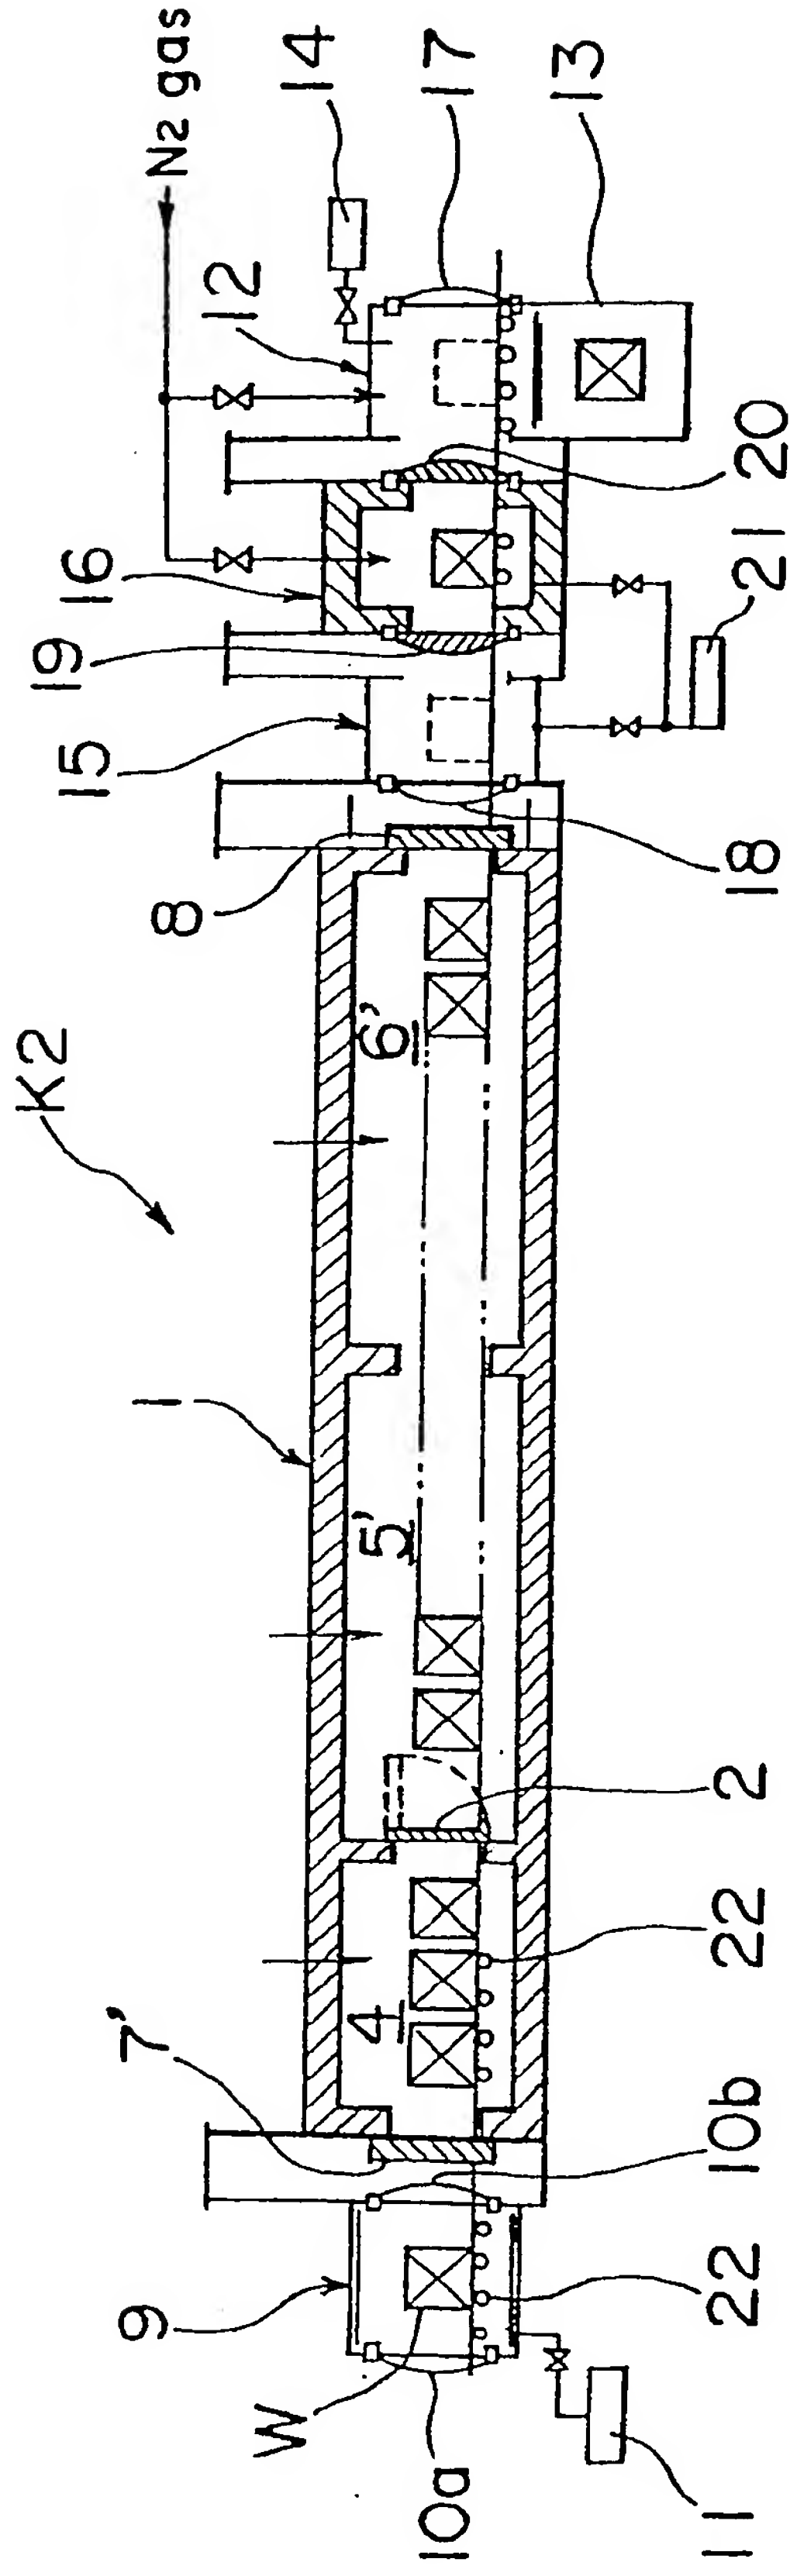

Europäisches Patentamt  
European Patent Office  
Office européen des brevets

Publication number:

**0 147 845**  
**A3**

## EUROPEAN PATENT APPLICATION

Application number: 84116330.6

Date of filing: 27.12.84

Int. Cl.<sup>4</sup>: **C 23 C 8/22**, **F 27 B 9/04**,  
**C 21 D 1/78**

Priority: 27.12.83 JP 247174/83

Date of publication of application: 10.07.85  
Bulletin 85/28

Designated Contracting States: **BE DE FR GB IT SE**

Date of deferred publication of search  
report: 26.03.86 Bulletin 86/13


Applicant: **Chugai Ro Kogyo Co., Ltd.**, 4-7,  
Kyomachibori 2-chome Nishi-ku, Osaka-shi Osaka-fu  
(JP)

Inventor: **Murakami, Koji**, 8-11-216, Showaen Settsu-shi,  
Osaka-fu (JP)  
Inventor: **Shima, Tsunao**, 1-3-8, Mayumi Ikoma-shi,  
Nara-ken (JP)  
Inventor: **Shimosato, Yoshikazu**, 14-109, Kakigadani  
Yahata, Yahata-shi Kyoto-fu (JP)  
Inventor: **Yokoyama, Akira**, 537-19, Teraji Seto-cho,  
Akaiwa-gun Okayama-ken (JP)

Representative: **Glawe, Delfs, Moll & Partner**  
Patentanwälte, Postfach 26 01 62 Liebherrstrasse 20,  
D-8000 München 26 (DE)

Method of gas carburizing and hardening and continuous furnace therefor.

A method of gas carburizing and hardening a steel article (W) and a continuous furnace (K1, K2) therefor. The method includes the steps of carburizing the article (W) in a carburizing atmosphere at atmospheric pressure, heating the article (W) in a vacuum for a predetermined period of time, and hardening the article (W).

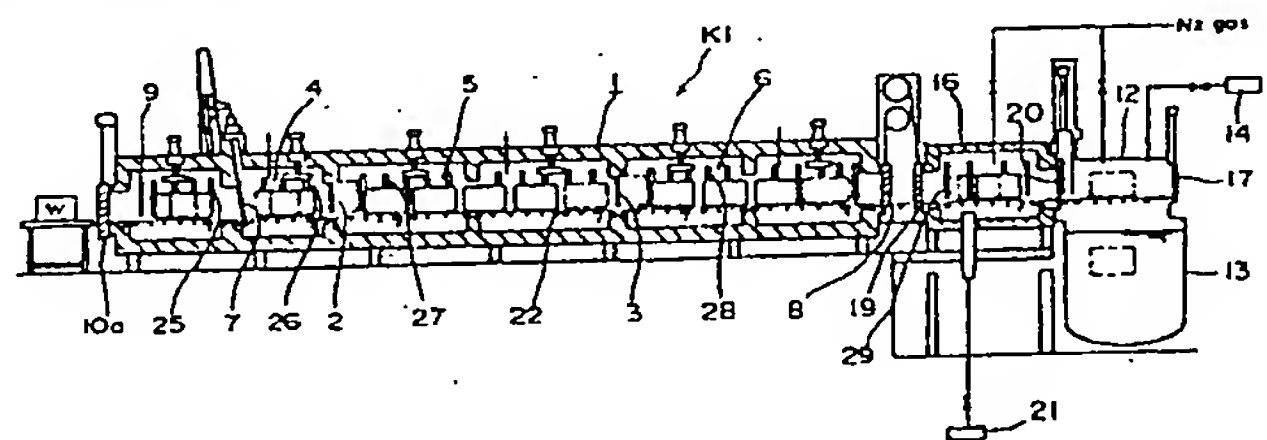

**EP 0 147 845 A3**



European Patent  
Office

# EUROPEAN SEARCH REPORT

0147845  
Application number

EP 84 11 6330

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. 4)
Y	EP-A-0 079 864 (ITALTRACTOR) * Claims 1-4 *	1, 4	C 23 C 8/22 F 27 B 9/04 C 21 D 1/78
Y	--- CHEMICAL ABSTRACTS, vol. 86., 1977, page 235, abstract no. 193810w, Columbus, Ohio, US; & SU - A - 530 927 (A.A. BABAD ZAKHRYAPIN et al.) 05-10-1976 * Abstract *	1, 4	
A	IDEM	2	
A	--- PATENTS ABSTRACTS OF JAPAN, vol. 7, no. 242 (C-192)[1387], 27th October 1983; & JP - A - 58 130 270 (MICHIO SUGIYAMA) 03-08-1983 * Abstract *	1-8, 15	
A	--- US-A-3 830 479 (MALCOLM FREDERICK WILLIAM KNOWLES) * Abstract; figures 1-5 *	2, 4	
A	--- GB-A-1 208 134 (GIBBONS BROTHERS) * Figures 17; claims 1-12 *	4, 6-20	C 23 C F 27 B C 21 D
A	--- GB-A- 606 996 (BIRLEC) * Claims 1-13 *	4, 6-20	
	--- -/-		
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 19-12-1985	Examiner ELSEN D.B.A.
<b>CATEGORY OF CITED DOCUMENTS</b>			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	



European Patent  
Office

# EUROPEAN SEARCH REPORT

0147845  
Application number

EP 84 11 6330

Page 2

## DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. 4)
A	GB-A- 910 741 (EFCO FURNACES) * Figures 1-3; claims 1-12 *	4,6-20	
A	FR-A-2 083 484 (HOLCROFT & CO.) * Claims 1-14; figures 1-9 *	4,6-20	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int. Cl. 4)

Place of search  
THE HAGUE

Date of completion of the search  
19-12-1985

Examiner  
ELSEN D.B.A.

### CATEGORY OF CITED DOCUMENTS

X : particularly relevant if taken alone  
Y : particularly relevant if combined with another document of the same category  
A : technological background  
O : non-written disclosure  
P : intermediate document

T : theory or principle underlying the invention  
E : earlier patent document, but published on, or after the filing date  
D : document cited in the application  
L : document cited for other reasons  
& : member of the same patent family, corresponding document

EPO Form 1503 03 82





**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☒ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☐ **FADED TEXT OR DRAWING**

☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**